



MDS INTERNATIONAL
LEAVE NO STONE UNTURNED

M615

MODULAR

TROMMEL



Drummond, Magheracloone
A81 TE82, Carrickmacross
Co. Monaghan, IRELAND

TEL: +353 42 966 7899
EMAIL: info@mds-int.net
WEB: www.mds-int.net

M615 MODULAR TROMMEL

The M615 Modular Trommel is capable of screening material at the rate of approximately 500 tons per hour with a max rock size of upto 800mm (32"). It is ideal for use in cleaning dirty rock or screening blasted material. With 3 possible configurations, our modular trommel covers many applications. The M615 can have upto 4 spilt.



OVERBURDEN




STICKY/DIRTY CLAY



RIP-RAP/ARMOUR ROCK



RECYCLING WASTE

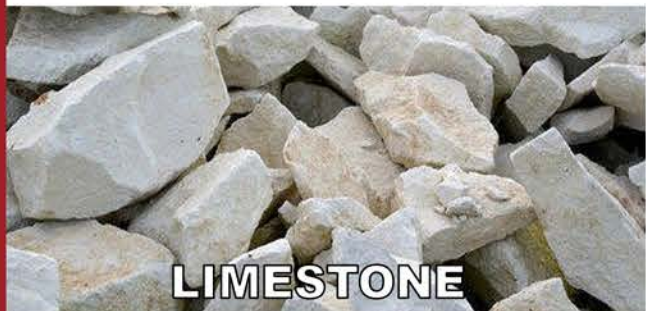

LIMESTONE



PRIMARY SCREENING



DEMOLITION WASTE



BLASTED ROCKS

MACHINE SPECIFICATIONS

Weight:	21.5 tons (47 400 lbs)	Working Length:	11511mm (37' 9")
Tons per Hour:	500 tons	Working Width:	8681mm (28' 6")
Drum Diameter:	1.5 m (4'11")	Working Height:	6458mm (21' 2")
Drum Length:	6 m (19' 8")	Feed Mechanism:	Hydraulic Push Feeder
Number of Outputs:	Upto 4 off	Transport Length:	12323mm (40' 4")
Max Rock Size:	800 mm (30")	Transport Width:	2650mm (8' 7")
Hopper Capacity:	12.6 m ³ (16.5yd ³)	Transport Height:	3036mm (9' 9")
Engine:	96 kW (128.7HP) Cat 4.4	Control Panel:	Digital IFM Colour Screen

TECHNICAL SPECIFICATIONS

MAX ROCK SIZE 800MM (32") **PERFECT FOR CLEANING DIRTY MATERIAL** **HYDRAULIC PUSH FEEDER** **TIPPING GRID (OPTIONAL)**




CHANGEABLE SCREENS




DIMENSION DRAWINGS

M615 MODULAR TROMMEL

TRANSPORT DRAWINGS

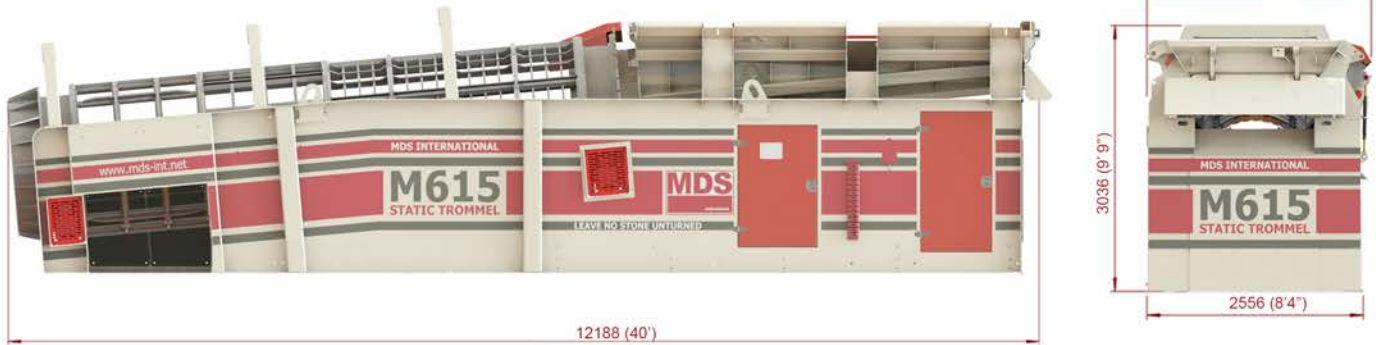

WORKING DRAWINGS

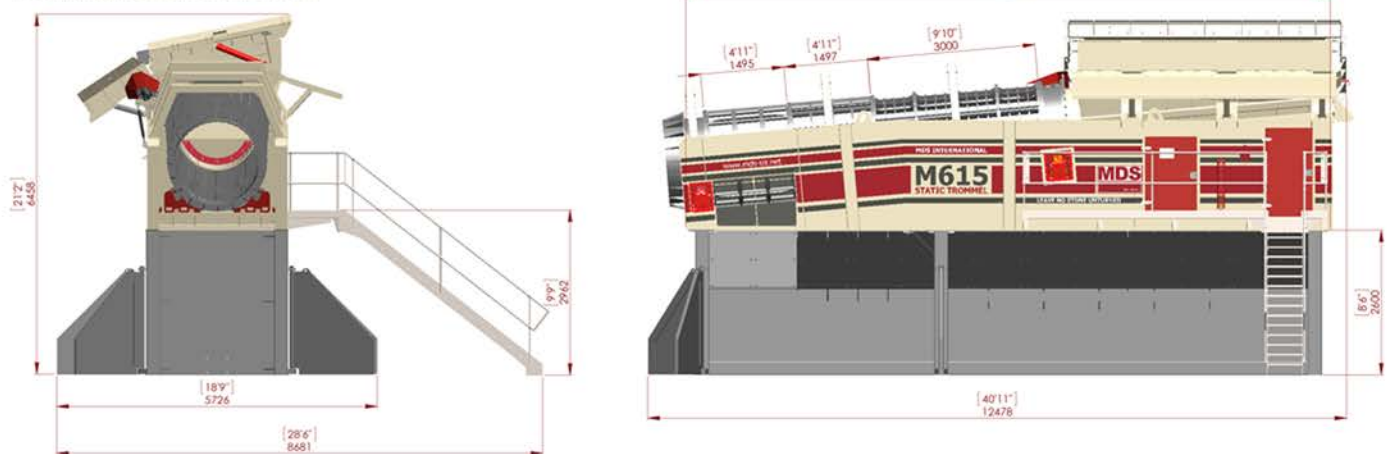

DRUM OPTIONS AVAILABLE

Fully Welded Drum Sections (Used for Drum Cleaner & Large RipRap Rocks)



Drum Frame with Changeable Screens



OPTIONAL EXTRAS



Heavy Duty Tipping Grid



Drum Cleaning Kit