



MDS INTERNATIONAL
LEAVE NO STONE UNTURNED

M515

3 Split Mobile

TROMMEL



Drummond, Magheracloone
A81 TE82, Carrickmacross
Co. Monaghan, IRELAND

TEL: +353 42 966 7899
EMAIL: info@mds-int.net
WEB: www.mds-int.net

/ **MDSInternational**

M515 3 SPLIT TRACK TROMMEL

The M515 Track Trommel is perfect for cleaning dirty material and can handle rocks up to 800 mm (32") in size. It comes complete with fold out stockpiling conveyors and is ideal for moving around the quarry and from one site to the next.



OVERBURDEN



STICKY/DIRTY CLAY



RIP-RAP/ARMOUR ROCK



STEEL SLAG



LIMESTONE



PRIMARY SCREENING



DEMOLITION/CONCRETE



BLASTED ROCKS


MACHINE SPECIFICATIONS

Weight:	48 tons	Feed Height:	5004mm (16' 5")
Tons per Hour:	350 to 500 tons	Fines Discharge Height:	3734mm (12' 3")
Drum Diameter:	1.5 m (4 ft 11")	MidProduct Discharge Height:	3510mm (11' 6")
Drum Length:	5.5 m (18 ft 1")	Oversize Discharge Height:	3722mm (12' 3")
Number of Outputs:	3 off	Transport Length:	17047mm (55' 11")
Max Rock Size:	800 mm (32")	Transport Width:	2980mm (9' 9")
Hopper Capacity:	12.6 m ³ (16.5 yd ³)	Transport Height:	3497mm (11' 6")
Engine:	96kW (128.7HP) Cat 4.4	Hopper Capacity:	Digital IFM Colour Screen



TECHNICAL SPECIFICATIONS

- OVERSIZE CONVEYOR**
MAX ROCK 800 mm (32")
- HEAVY DUTY DRUM**
With changeable screens
- IDEAL FOR CLEANING DIRTY MATERIAL**
- HYDRAULIC PUSH FEEDER**

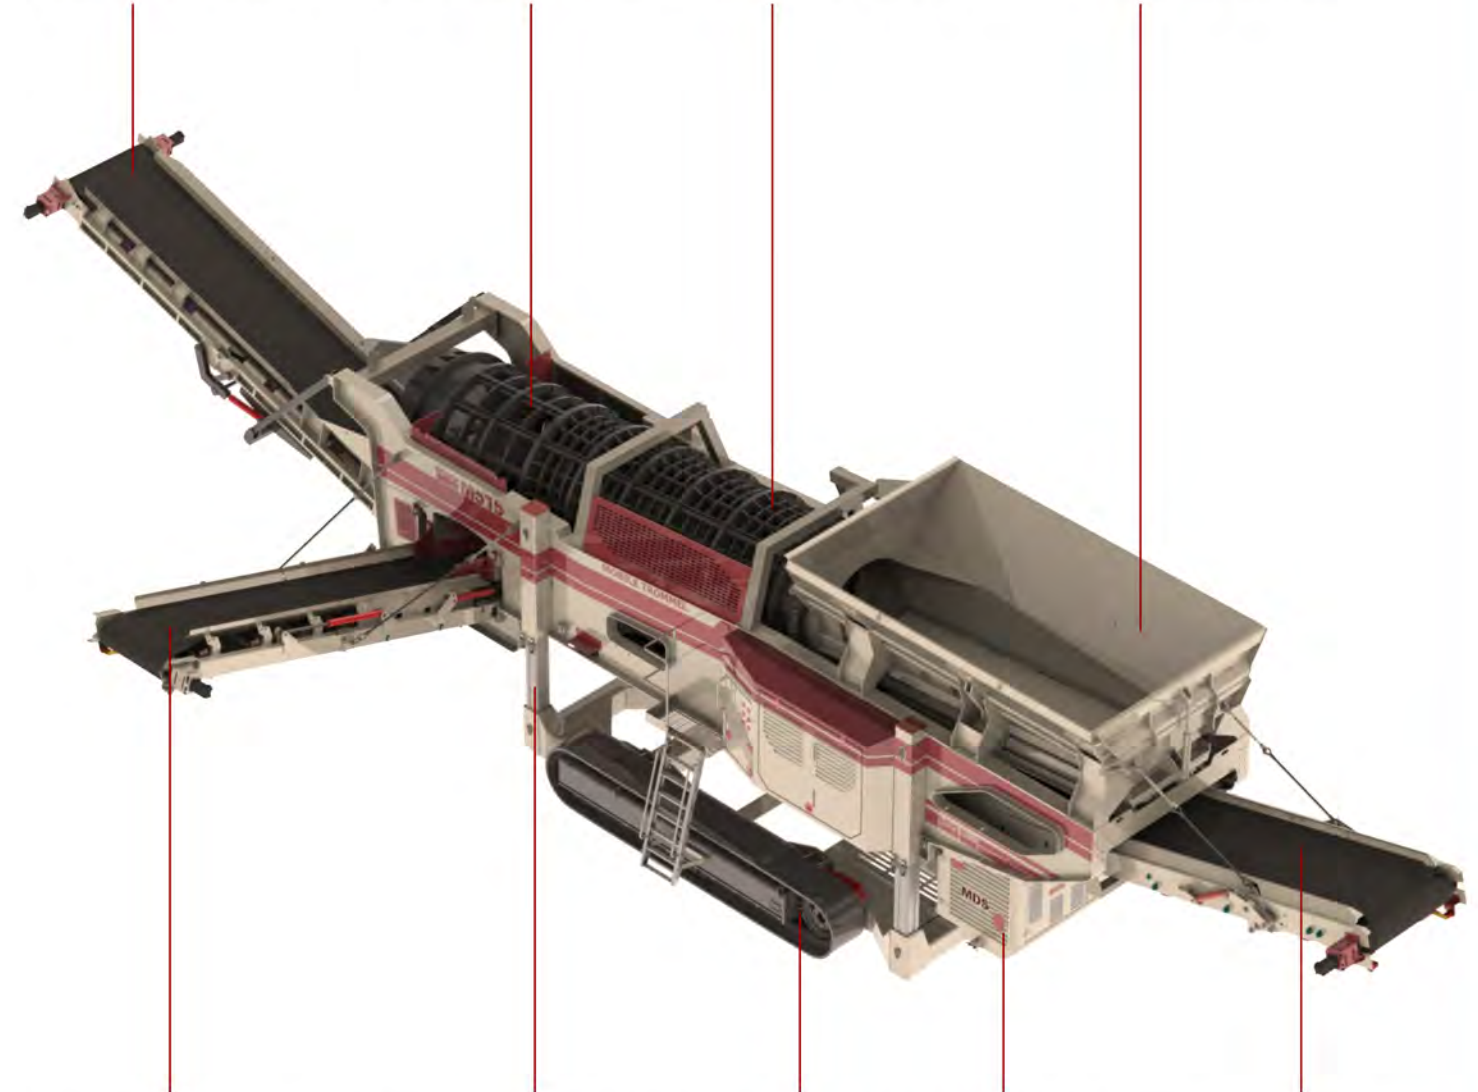


- MID-PRODUCT CONVEYOR**
MAX ROCK 460 mm (18")
- ADJUSTABLE HEIGHT**
- ALL TERRAIN TRACKS**
- DIESEL ENGINE**
CAT 4.4
- FINES CONVEYOR**

CHANGEABLE SCREENS




- 2"/3" (50/75mm)
- 2"/3" (50/75mm)
- 4" (100mm)
- 5" (125mm)
- 6" (150mm)
- 8" (200mm)
- 10" (250mm)
- 12" (300mm)

DIMENSION DRAWINGS

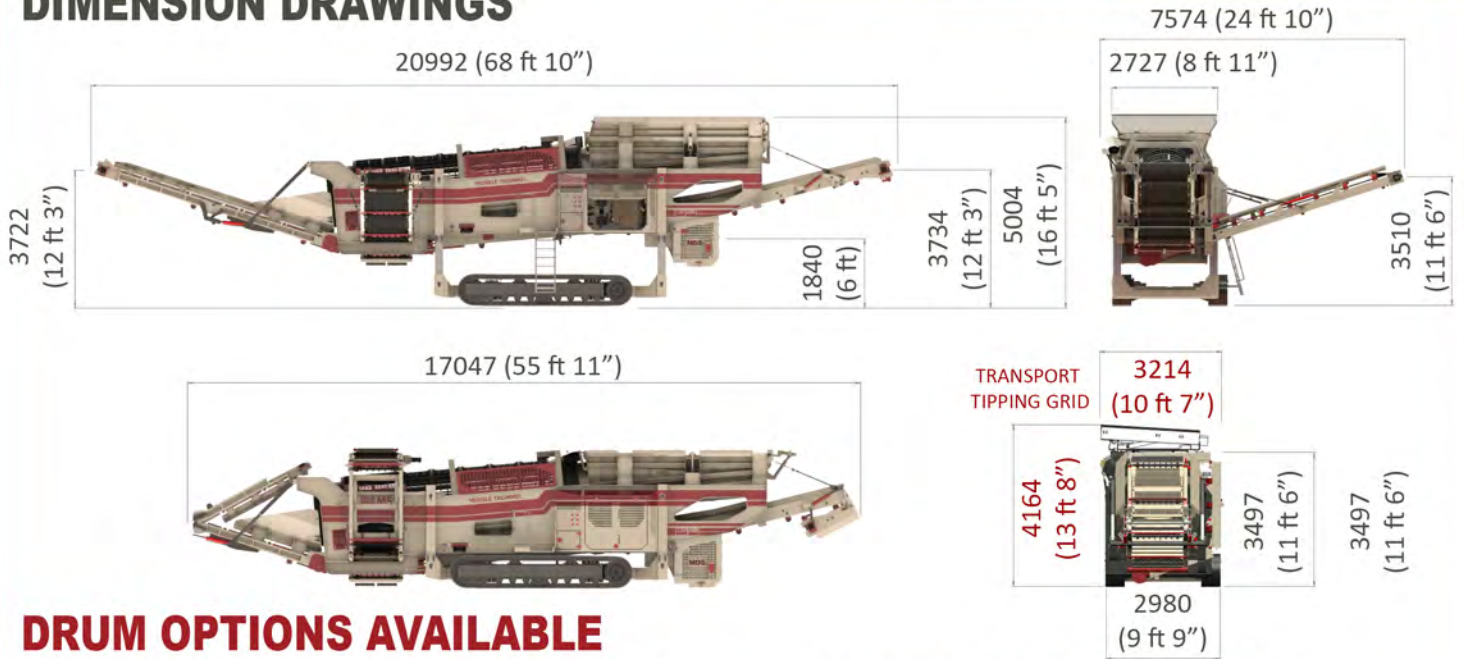

DRUM OPTIONS AVAILABLE

Fully Welded Drum Sections (Used for Drum Cleaner & Large RipRap Rocks)

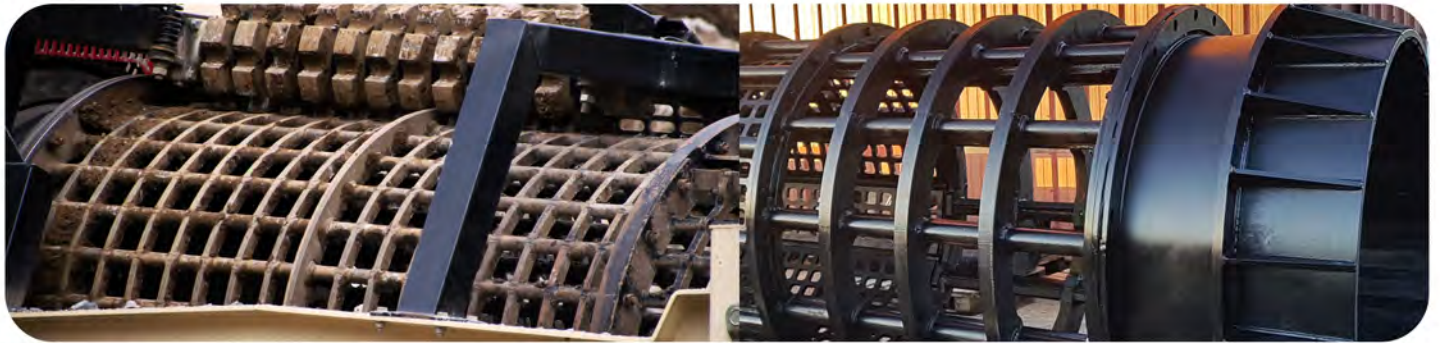

Drum Frame with Changeable Screens



OPTIONAL EXTRAS



Heavy Duty Tipping Grid



Drum Cleaning Kit