



CONVEYOR RANGE



www.mds-int.net

MT21 & MT24 TRACKED CONVEYORS



FEATURES & BENEFITS

The MDS range of mobile conveyors are designed to work in conjunction with the entire range of MDS crushing and screening equipment. Using conveyors means increased stockpile capacity and reduces on-site material handling. For convenience and to keep shipping costs low, MDS conveyors can be transported in a 40ft container. The range includes 65ft and 80ft track mobile conveyors: MT21 and MT24.

TRANSPORT DIMENSIONS	MT21	MT24
Length	11.3m (37')	11.88m (38' 11")
Width	2.25m (7' 4")	2.25m (7' 4")
Height	2.65m (8' 8")	2.88m (9' 5")
Weight (Est.)	13,820kgs (30,467lbs)	16,750kgs (36,927lbs)
Containerised shipping	40' x 9' 6" High Cube Container	40' x 9' 6" High Cube Container

CONVEYOR DETAILS	MT21	MT24
Conveyor length	19.79m (64' 11")	22.8m (74' 10")
Belt width	1050mm (42")	1050mm (42")
Discharge height	9.1m (29'10") @ 24°	9.9m (32' 5") @ 24°
Max. discharge height	9.45m (31') @ 28°	10.41m (34'1") @ 25°
Production capacity	Up to 500+TPH (551+ US TPH)	Up to 500+TPH (551+ US TPH)

OPTIONS*	MT21	MT24
Feedboot liners: AR400 plate or 20mm rubber	•	•
Feedboot extension with liners	•	•
Large capacity biomass hopper	•	•
Chevron belt	•	•
Twin hydraulic drive discharge conveyor	•	•
Aluminium dust covers	•	•
Spray bar at head drum	•	•
Full length skirting rubber	•	•
Overband magnet with hydraulic kit and support frames	•	•
Hybrid complete with hydraulic and electric conveyor drive (400 TPH)	•	•
Twin Electric Drive 2 x 11kw motors (Hydraulic Conveyor Drive Removed) (400 tph)	•	•
Radio Remote to track machine	•	•
Telematics	•	•

* Additional options are available.



Tier 3: Deutz DT011 36kW (45hp)
 Tier 4F: Deutz TD2.9 45kW (60hp)
 Stage V: Deutz TC 2.9 L4 45kW (60hp)
 Fuel tank volume 200L (58 US GAL)

MT31 TRACKED CONVEYOR

FEATURES & BENEFITS

The MDS MT31 stockpiler, builds on the hugely successful MDS MT21 & MT24 conveyors. The extra length of conveyor, and increased power, allows for maximum mobility and flexibility, reducing or eliminating the use of wheeled loaders on site. The conveyor can cope with all applications, from light duty screened material, through to jaw applications. The Conveyor is 100ft long and still retains the ability to be transported worldwide in a 40ft container.



TRANSPORT DIMENSIONS	MT31
Length	11.9m (39')
Width	2.84m (9' 4")
Height	3.43m (11' 3")
Weight (Est.)	21,800kg (48,060lbs)
Containerised shipping	40' x 9' 6" High Cube Container

CONVEYOR DETAILS	MT31
Conveyor length	30.1m (98' 9")
Belt width	1050mm (42")
Discharge height	10.1m (33' 1") @ 18°
Max. discharge height	13.1m (43' 11") @ 25°
Production capacity	Up to 600TPH (661 US TPH)

**Contact factory for availability

OPTIONS*
Feedboot liners: AR400 plate or 20mm rubber
Feedboot extension with liners
Impact bed at feedboot area
Anti-roll back flaps
Chevron belt
Heavy duty plain belt
Twin hydraulic drive discharge conveyor
High spec scraper on discharge conveyor at head drum
Dust hood
Canvas dust covers
Dust suppression water spray bar at head drum
Full length skirting rubber
Overband magnet with hydraulic kit and support frames
Grease lines to head drum bearings on discharge conveyor
Radio remote to track machine
Telematics

MT24R TRACKED RADIAL CONVEYOR

FEATURES & BENEFITS

The MDS MT24R tracked radial stockpiling conveyor is the ideal solution for stockpiling after mobile crushing and screening plants. The mobility and flexibility of the radial stockpiling conveyors reduces the use of a wheel loader on site. The conveyors ensure all applications are catered for from the easiest, right through to the hardest.



TRANSPORT DIMENSIONS	MT24R
Length	15.2m (49' 10")
Width	2.52m (8' 3")
Height	3.43m (11' 3")
Weight (Est.)	19,800kg (43,651lbs)
Containerised shipping	40' x 9' 6" High Cube Container

CONVEYOR DETAILS	MT24R
Conveyor length	22.9m (75' 1")
Belt width	1050mm (42")
Discharge height	9m (29' 6") @ 18°
Max. discharge height	10.9m (34' 9") @ 23°
Production capacity	Up to 600TPH (661 US TPH)


OPTIONS*
Feedboot liners: AR400 plate or 20mm rubber
Feedboot extension with liners
Impact bed at feedboot area
Anti-roll back flaps
Chevron belt
Heavy duty plain belt
Twin hydraulic drive discharge conveyor
High spec discharge conveyor head drum scraper
Dust hood
Canvas dust covers
Dust suppression water spray bar at head drum
Full length skirting rubber
Grease lines to head drum bearings on discharge conveyor
Belt weigher
Radio remote to stop/start, raise/lower conveyor
Radio Remote to track machine
Auto radial & raise function
Telematics

MT24H HIGH LEVEL FEEDER



FEATURES & BENEFITS

The MDS MT24H high level feeder, combines the highly versatile feeder system and stockpiling conveyor, allowing the operator to directly discharge from wheel loaders to reduce the amount of material handling on site. The fully mobile units can be used for a 'metered or controlled' feed of material into any MDS products or other machines.

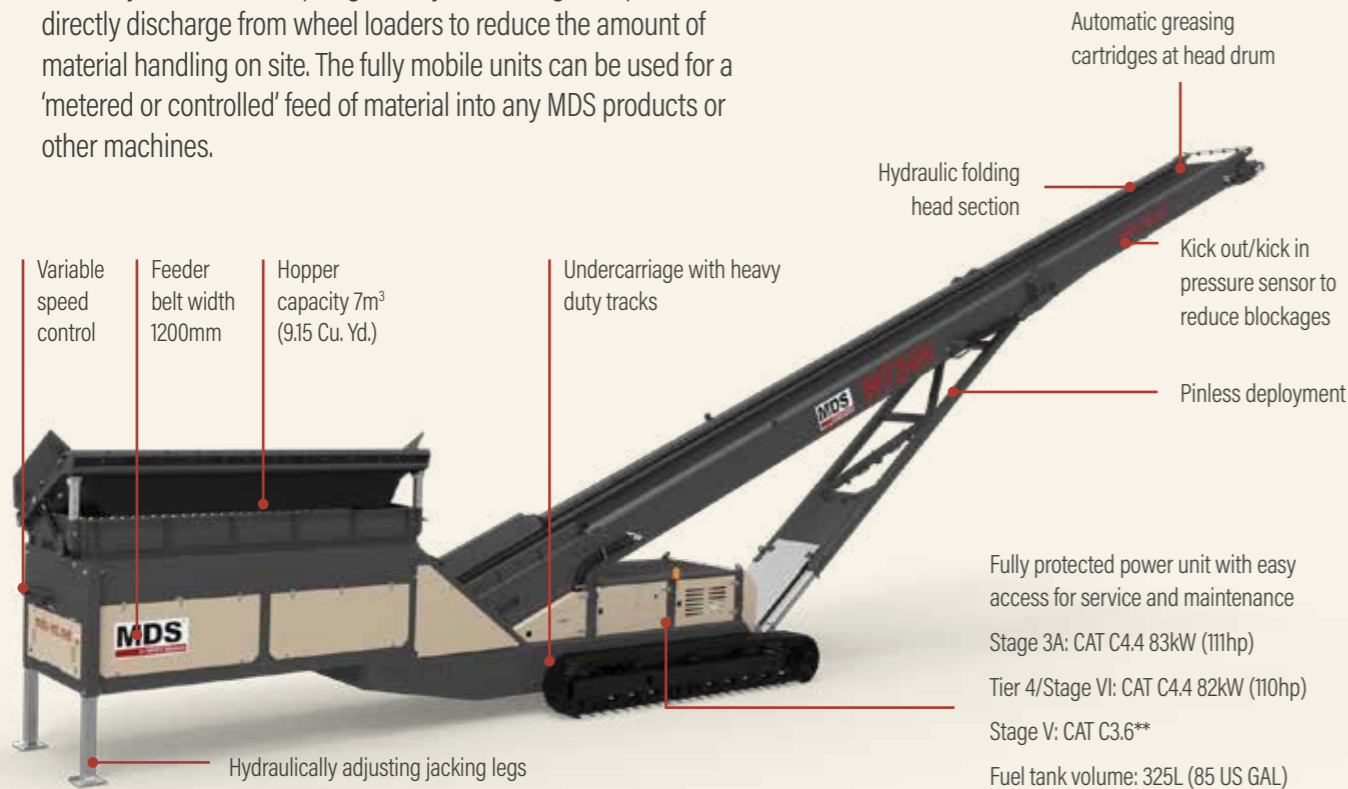

TRANSPORT DIMENSIONS	HIGH LEVEL FEEDER
Length	19.5m (63' 11")
Width	2.75m (9')
Height	3.12m (10' 2")
Weight (Est.)	23,500kg (51,808lbs)
Containerised shipping	40' x 9' 6" 2 x High Cube Containers

CONVEYOR DETAILS	HIGH LEVEL FEEDER
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1200mm (48")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	9.8m (32' 2") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
AR400 steel wear liners in hopper
4" or 6" tipping grid fitted to feed conveyor
12ft 2-Deck vibrating grid with radio control tipping bofor grid
Upgraded hopper with integrated fall break system
Twin hydraulic drive feed conveyor
Twin Hydraulic Drive Discharge Conveyor
Discharge conveyor drive drum upgraded to ceramic lagging
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Dust suppression water spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher option
Overband magnet on discharge conveyor with hydraulic kit and support frames
Hybrid
Radio remote to stop/start feed conveyor, raise/lower discharge conveyor and tip grid
Radio remote to track machine
Telematics

MT24L LOW LEVEL FEEDER



FEATURES & BENEFITS

The MDS MT24L low level feeder allows the operator to directly discharge from wheel loaders and excavators at a significantly lower feed in height compared to standard hopper feeders. The unique design of the hopper allows for rear feeding which can be an advantage when operating in restricted areas.



TRANSPORT DIMENSIONS	LOW LEVEL FEEDER
Length	19.74m (64' 9")
Width	2.75m (9')
Height	3.35m (11')
Weight (Est.)	24,700kg (54,454lbs)
Containerised shipping	40' x 9' 6" 2 x High Cube Containers


CONVEYOR DETAILS	LOW LEVEL FEEDER
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1300mm (4' 3")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	9.8m (32' 2") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
AR400 steel liners bolted into hopper
AR400 steel wear liners on hopper flares
Large capacity hopper
Feedboot lined with 6mm AR400 wearplate
Feed conveyor drive drum upgraded to ceramic lagging
Manually adjusting jacking legs
Discharge conveyor drive drum upgraded to ceramic lagging
Twin hydraulic drive discharge conveyor
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Hybrid
Radio remote to stop/start feed conveyor and raise/lower discharge conveyor
Radio remote to track machine
Telematics

MT24H ORBITAL FEEDER

FEATURES & BENEFITS

The MDS MT24H Orbital high level feeder permits operators to directly discharge to the hopper/feeder from excavators or wheel loaders eliminating double handling of material on site. The rotating undercarriage allows the conveyor to rotate a full 360° which provides increased versatility on site. It can be used for a 'metered or controlled' feed of material when working as part of a crushing and screening train or in standalone applications.

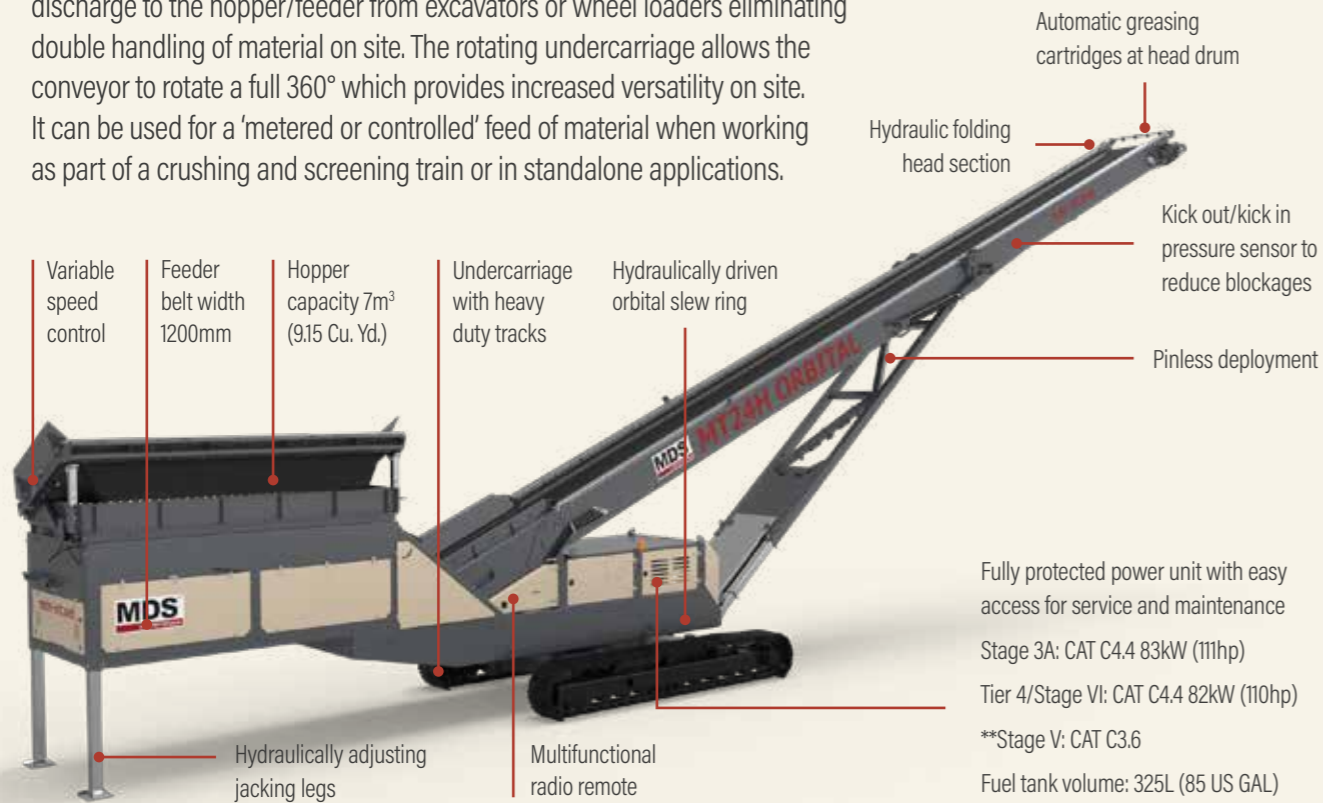

TRANSPORT DIMENSIONS	MT24H ORBITAL
Length	19.5m (63')
Width	3.2m (10' 6")
Height	3.63m (11' 11")
Weight (Est.)	29,300kg (64,595lbs)
Containerised shipping	40' x 9' 6" 2x High Cube Container

CONVEYOR DETAILS	MT24H ORBITAL
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1200 mm (48")
Discharge height	8.80m (28' 2") @ 18°
Max. discharge height	10.7m (34' 6") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
AR400 steel wear liners in hopper
4" or 6" tipping grid option
12ft 2-Deck vibrating grid with radio control tipping bofor grid
Upgraded hopper with integrated Fall Break System
Twin hydraulic drive feed conveyor
Twin hydraulic drive discharge conveyor
Discharge conveyor drive drum upgraded to ceramic lagging
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Telematics

MT24L ORBITAL FEEDER

FEATURES & BENEFITS

The MDS MT24L Orbital low level feeder features a rotating undercarriage which allows the conveyor to rotate a full 360° to provide increased versatility on site. With unrivalled portability and durability, the MT24L Orbital can operate in a wide variety of working environments. This conveyor can be integrated with crushers and screeners to stockpile material directly from the source. Site traffic will also be reduced, and it will remove the need for double handling of material. The machine can also be used as a mobile link conveyor.



TRANSPORT DIMENSIONS	MT24L ORBITAL
Length	19.7m (64' 8")
Width	3.2m (10' 6")
Height	3.63m (11' 11")
Weight (Est.)	29,550kg (65,146lbs)
Containerised shipping	40' x 9' 6" 2x High Cube Container

CONVEYOR DETAILS	MT24L ORBITAL
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1300mm (4' 3")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	10.7m (35') @ 24°
Production capacity	Up to 600+TPH (661 US TPH)


OPTIONS*
AR400 steel liners bolted into hopper
Large capacity hopper
Feedboot lined with AR400 wearplate
Feed conveyor drive drum upgraded to ceramic lagging
Manually adjusting jacking legs
Discharge conveyor drive drum upgraded to ceramic lagging
Twin hydraulic drive discharge conveyor
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Telematics

MT24H ORGANIC FEEDER



FEATURES & BENEFITS

The MDS MT24H Organic feeder has been engineered specifically for the stockpiling and aerating of lower density, bulky materials such as soils, mulch, biomass and compost. Specifically designed organics hopper improves material flow eliminating bridging and ensures efficient movement of materials whilst the auger at the hopper outlet provides aeration and untangling solution therefore minimizing fluctuations in bulk density of organic materials.

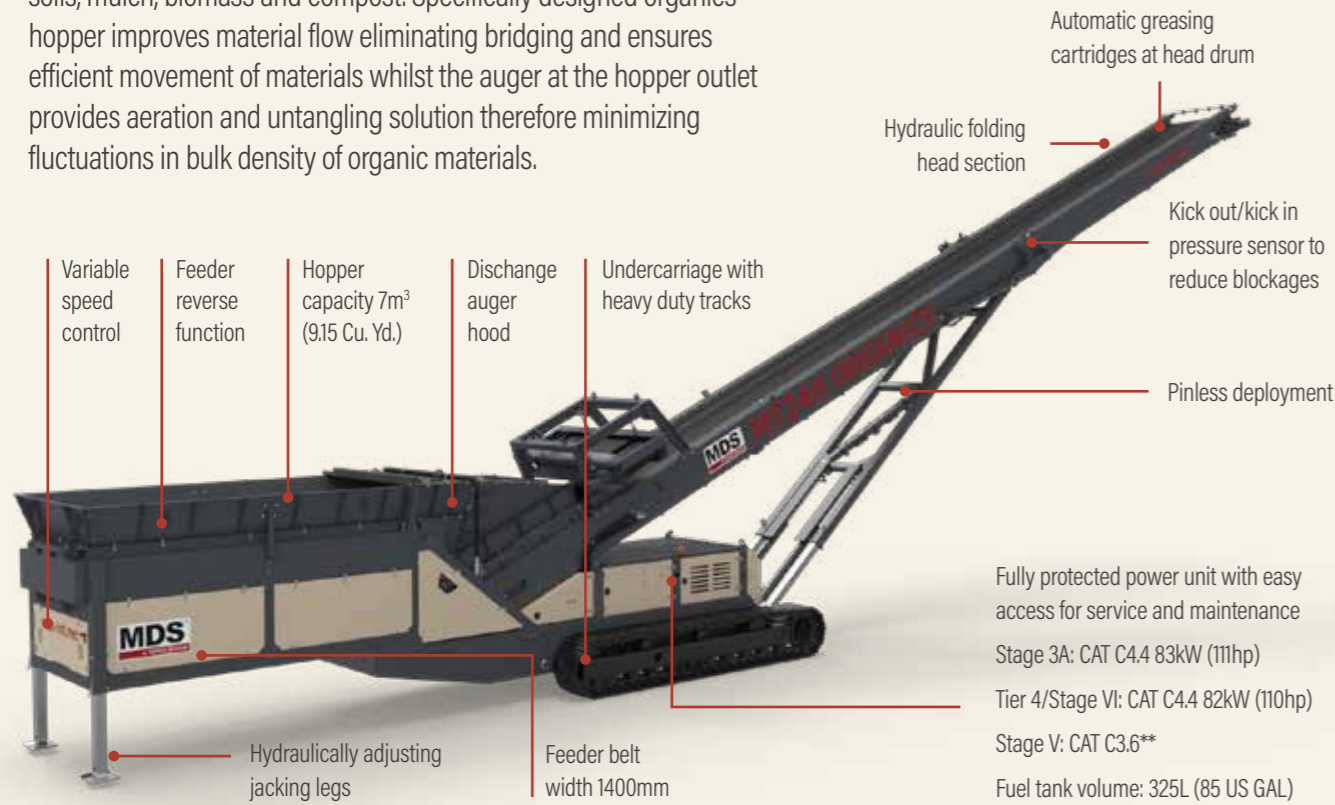

(Shown with optional overband magnet)

TRANSPORT DIMENSIONS	MT24H ORGANIC
Length	19.5m (63')
Width	2.7m (8' 8")
Height	3m (9' 8")
Weight (Est.)	24,350kg (53,682)
Containerised shipping	40' x 9' 6" 2x High Cube Containers

CONVEYOR DETAILS	MT24H ORGANIC
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1400 mm (56")
Discharge height	8.80m (28' 2") @ 18°
Max. discharge height	9.8m (32' 2") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
Discharge conveyor drive drum upgraded to ceramic lagging
Feed conveyor drive drum upgraded to ceramic lagging
High spec SCS scraper discharge conveyor at head drum
Discharge conveyor underguard length of mid-section
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Hybrid
Radio remote to stop/start feed conveyor, raise/lower discharge conveyor
Radio Remote to track machine
Telematics

MT24H ORGANIC ORBITAL FEEDER

FEATURES & BENEFITS

The MDS MT24H Organic Orbital feeder features a rotating undercarriage providing increased versatility and is ideal for stockpiling and aerating of lower density, bulky materials such as soil, mulch, biomass and compost. Located at the hopper outlet, the auger provides aeration and an untangling solution for organic materials. The auger flips, rotates and regulates the flow of material minimising fluctuations in the bulk density of organic materials and is equipped with replaceable hardened paddle wear plates.



(Shown with optional overband magnet)

TRANSPORT DIMENSIONS	MT24H ORGANIC ORBITAL
Length	22.5m (73' 10")
Width	3.2m (10' 6")
Height	3.63m (11' 11")
Weight (Est.)	29,300kg (64,595lbs)
Containerised shipping	40' x 9' 6" 2x High Cube Container

CONVEYOR DETAILS	MT24H ORGANIC ORBITAL
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1400 mm (56")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	10.7m (34' 6") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
Discharge conveyor drive drum upgraded to ceramic lagging
Feed conveyor drive drum upgraded to ceramic lagging
High spec SCS scraper discharge conveyor at head drum
Discharge conveyor underguard length of mid-section
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Telematics



MDS International
Drummond, Magheracloone.
Carrickmacross,
Co. Monaghan
Republic of Ireland
A81 TE82

Tel: +353 42 966 7899

Email: info@mds-int.net



www.mds-int.net

The material in this document is for information only and is subject to change without notice.

Terex assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein.

Due to continual product development we reserve the right to change specifications without notice.

Photographs are for illustrative purposes only, some or all of the machines in the illustrations may be fitted with optional extras.

Copyright 2021 Terex GB Limited.

Published and Printed in October 2021.